



SMART CONTRACT AUDIT REPORT

for

SWCH Token



Prepared By: Xiaomi Huang

PeckShield
July 14, 2023

Document Properties

Client	Swisscheese
Title	Smart Contract Audit Report
Target	Swisscheese SWCH Token
Version	1.0
Author	Patrick Lou
Auditors	Patrick Lou, Xuxian Jiang
Reviewed by	Luck Hu
Approved by	Xuxian Jiang
Classification	Public

Version Info

Version	Date	Author	Description
1.0	July 14, 2023	Patrick Lou	Final Release

Contact

For more information about this document and its contents, please contact PeckShield Inc.

Name	Xiaomi Huang
Phone	+86 183 5897 7782
Email	contact@peckshield.com

Contents

1	Introduction	4
1.1	About Swisscheese SWCH Token	4
1.2	About PeckShield	5
1.3	Methodology	5
1.4	Disclaimer	7
2	Findings	8
3	ERC20 Compliance Checks	9
4	Conclusion	12
	References	13



1 | Introduction

Given the opportunity to review the design document and related source code of the `Swisscheese SWCH` contract, we outline in the report our systematic method to evaluate potential security issues in the smart contract implementation, expose possible semantic inconsistency between smart contract code and the documentation, and provide additional suggestions or recommendations for improvement. Our results show that the given version of the smart contract exhibits no ERC20 compliance issues or security concerns. This document outlines our audit results.

1.1 About Swisscheese SWCH Token

`Swisscheese` provides a decentralized platform where users can efficiently trade tokenized stocks using `SWCH` and other cryptocurrencies. The audited `SWCH` token contract is an `ERC20`-compliant token with the basic information shown as follows:

Table 1.1: Basic Information of `Swisscheese SWCH` Token Contract

Item	Description
Name	Swisscheese
Website	https://swisscheese.finance
Type	Ethereum ERC20 Token Contract
Platform	Solidity
Audit Method	Whitebox
Audit Completion Date	July 14, 2023

In the following, we show the MD5 hash value of the related smart contract file for audit:

- MD5 (SWCH.sol) = 312b28c8e80f4390eb81ec7f3f7c9ef8

1.2 About PeckShield

PeckShield Inc. [2] is a leading blockchain security company with the goal of elevating the security, privacy, and usability of current blockchain ecosystem by offering top-notch, industry-leading services and products (including the service of smart contract auditing). We are reachable at Telegram (<https://t.me/peckshield>), Twitter (<http://twitter.com/peckshield>), or Email (contact@peckshield.com).

1.3 Methodology

To standardize the evaluation, we define the following terminology based on OWASP Risk Rating Methodology [1]:

- Likelihood represents how likely a particular vulnerability is to be uncovered and exploited in the wild;
- Impact measures the technical loss and business damage of a successful attack;
- Severity demonstrates the overall criticality of the risk;

Likelihood and impact are categorized into three ratings: *H*, *M* and *L*, i.e., *high*, *medium* and *low* respectively. Severity is determined by likelihood and impact and can be classified into four categories accordingly, i.e., *Critical*, *High*, *Medium*, *Low* shown in Table 1.2.

Table 1.2: Vulnerability Severity Classification

Impact	High	Critical	High	Medium
	Medium	High	Medium	Low
	Low	Medium	Low	Low
		High	Medium	Low
		Likelihood		

We perform the audit according to the following procedures:

- Basic Coding Bugs: We first statically analyze given smart contracts with our proprietary static code analyzer for known coding bugs, and then manually verify (reject or confirm) all the issues found by our tool.

- ERC20 Compliance Checks: We then manually check whether the implementation logic of the audited smart contract(s) follows the standard ERC20 specification and other best practices.
- Additional Recommendations: We also provide additional suggestions regarding the coding and development of smart contracts from the perspective of proven programming practices.

Table 1.3: The Full List of Check Items

Category	Check Item
Basic Coding Bugs	Constructor Mismatch
	Ownership Takeover
	Redundant Fallback Function
	Overflows & Underflows
	Reentrancy
	Money-Giving Bug
	Blackhole
	Unauthorized Self-Destruct
	Revert DoS
	Unchecked External Call
	Gasless Send
	Send Instead of Transfer
	Costly Loop
	(Unsafe) Use of Untrusted Libraries
	(Unsafe) Use of Predictable Variables
	Transaction Ordering Dependence
	Deprecated Uses
	Approve / TransferFrom Race Condition
ERC20 Compliance Checks	Compliance Checks (Section 3)
Additional Recommendations	Avoiding Use of Variadic Byte Array
	Using Fixed Compiler Version
	Making Visibility Level Explicit
	Making Type Inference Explicit
	Adhering To Function Declaration Strictly
	Following Other Best Practices

To evaluate the risk, we go through a list of check items and each would be labeled with a severity category. For one check item, if our tool does not identify any issue, the contract is considered safe regarding the check item. For any discovered issue, we might further deploy contracts on our private testnet and run tests to confirm the findings. If necessary, we would additionally build a PoC to demonstrate the possibility of exploitation. The concrete list of check items is shown in Table 1.3.

1.4 Disclaimer

Note that this security audit is not designed to replace functional tests required before any software release, and does not give any warranties on finding all possible security issues of the given smart contract(s) or blockchain software, i.e., the evaluation result does not guarantee the nonexistence of any further findings of security issues. As one audit-based assessment cannot be considered comprehensive, we always recommend proceeding with several independent audits and a public bug bounty program to ensure the security of smart contract(s). Last but not least, this security audit should not be used as investment advice.




2 | Findings

Here is a summary of our findings after analyzing the `SWCH` contract design and implementation. During the first phase of our audit, we study the smart contract source code and run our in-house static code analyzer through the codebase. The purpose here is to statically identify known coding bugs, and then manually verify (reject or confirm) issues reported by our tool. We further manually review business logics, examine system operations, and place ERC20-related aspects under scrutiny to uncover possible pitfalls and/or bugs.

Moreover, we explicitly evaluate whether the given contracts follow the standard ERC20 specification and other known best practices, and validate its compatibility with other similar ERC20 tokens and current DeFi protocols. The detailed ERC20 compliance checks are reported in Section 3. After that, we examine the presence of any possible issues of varying severities that need to be brought up and paid more attention to. Our examination shows no issue that needs further investigation.

Overall, no ERC20 compliance issue was found and our detailed checklist can be found in Section 3.

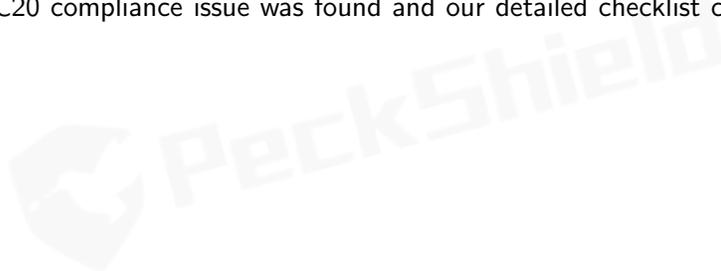

3 | ERC20 Compliance Checks

The ERC20 specification defines a list of API functions (and relevant events) that each token contract is expected to implement (and emit). The failure to meet these requirements means the token contract cannot be considered to be ERC20-compliant. Naturally, as the first step of our audit, we examine the list of API functions defined by the ERC20 specification and validate whether there exist any inconsistency or incompatibility in the implementation or the inherent business logic of the audited contract(s).

Table 3.1: Basic `view-only` Functions Defined in The ERC20 Specification

Item	Description	Status
name()	Is declared as a public view function	✓
	Returns a string, for example "Tether USD"	✓
symbol()	Is declared as a public view function	✓
	Returns the symbol by which the token contract should be known, for example "USDT". It is usually 3 or 4 characters in length	✓
decimals()	Is declared as a public view function	✓
	Returns decimals, which refers to how divisible a token can be, from 0 (not at all divisible) to 18 (pretty much continuous) and even higher if required	✓
totalSupply()	Is declared as a public view function	✓
	Returns the number of total supplied tokens, including the total minted tokens (minus the total burned tokens) ever since the deployment	✓
balanceOf()	Is declared as a public view function	✓
	Anyone can query any address' balance, as all data on the blockchain is public	✓
allowance()	Is declared as a public view function	✓
	Returns the amount which the spender is still allowed to withdraw from the owner	✓

Our analysis shows that there is no ERC20 inconsistency or incompatibility issue found in the audited token contract. In the surrounding two tables, we outline the respective list of basic `view-only` functions (Table 3.1) and key `state-changing` functions (Table 3.2) according to the widely-adopted

ERC20 specification.

Table 3.2: Key State-Changing Functions Defined in The ERC20 Specification

Item	Description	Status
transfer()	Is declared as a public function	✓
	Returns a boolean value which accurately reflects the token transfer status	✓
	Reverts if the caller does not have enough tokens to spend	✓
	Allows zero amount transfers	✓
	Emits Transfer() event when tokens are transferred successfully (include 0 amount transfers)	✓
transferFrom()	Is declared as a public function	✓
	Returns a boolean value which accurately reflects the token transfer status	✓
	Reverts if the spender does not have enough token allowances to spend	✓
	Updates the spender's token allowances when tokens are transferred successfully	✓
	Reverts if the from address does not have enough tokens to spend	✓
	Allows zero amount transfers	✓
	Emits Transfer() event when tokens are transferred successfully (include 0 amount transfers)	✓
approve()	Is declared as a public function	✓
	Returns a boolean value which accurately reflects the token approval status	✓
	Emits Approval() event when tokens are approved successfully	✓
Transfer() event	Is emitted when tokens are transferred, including zero value transfers	✓
	Is emitted with the from address set to <i>address(0x0)</i> when new tokens are generated	✓
Approve() event	Is emitted on any successful call to approve()	✓

In addition, we perform a further examination on certain features that are permitted by the ERC20 specification or even further extended in follow-up refinements and enhancements (e.g., ERC777), but not required for implementation. These features are generally helpful, but may also impact or bring certain incompatibility with current DeFi protocols. Therefore, we consider it is important to highlight them as well. This list is shown in Table 3.3.

Table 3.3: Additional `opt-in` Features Examined in Our Audit

Feature	Description	Opt-in
Deflationary	Part of the tokens are burned or transferred as a fee while on <code>transfer()/transferFrom()</code> calls	—
Rebasing	The <code>balanceOf()</code> function returns a re-based balance instead of the actual stored amount of tokens owned by the specific address	—
Pausable	The token contract allows the owner or privileged users to pause the token transfers and other operations	—
Blacklistable	The token contract allows the owner or privileged users to blacklist a specific address such that token transfers and other operations related to that address are prohibited	—
Mintable	The token contract allows the owner or privileged users to mint tokens to a specific address	—
Burnable	The token contract allows the owner or privileged users to burn tokens of a specific address	—
Hookable	The token contract allows the sender/recipient to be notified while sending/receiving tokens	—
Permittable	The token contract allows for unambiguous expression of an intended spender with the specified allowance in an off-chain manner (e.g., a <code>permit()</code> call to properly set up the allowance with a signature).	—

4 | Conclusion

In this security audit, we have examined the `Swisscheese SWCH` contract design and implementation. During our audit, we first checked all respects related to the compatibility of the ERC20 specification and other known ERC20 pitfalls/vulnerabilities and found no issue in these areas. We then proceeded to examine other areas such as coding practices and business logics. Overall, no issue was found in these areas, and the current deployment follows the best practice. Meanwhile, as disclaimed in Section 1.4, we appreciate any constructive feedbacks or suggestions about our findings, procedures, audit scope, etc.



References

- [1] OWASP. Risk Rating Methodology. https://www.owasp.org/index.php/OWASP_Risk_Rating_Methodology.
- [2] PeckShield. PeckShield Inc. <https://www.peckshield.com>.

